

# I. About Us

## FOMEX GROUP

**Head Office:** FOMEX Building, #2 Lane 68, Luu Huu Phuoc, Cau Dien Ward, Nam Tu Liem District, Hanoi, Vietnam.

### **Mission**

Provide Vietnamese plywood products with the most suitable quality for the world and bring green and sustainable development to everyone, especially forest growers.

### **Vision**

To be an enterprise that develops and connects forestry value chains towards sustainable development for a green life.



# FOMEX ECO-SYSTEM

Forest Planting  
Development

Re-investing on the Forest

Legal Wood Log  
& Veneer

Trading  
& Exporting

Plywood  
Production

Finished Plywood

SUSTAINABLE FOR THE GREENLIFE



Fomex Group

# About Us



## FILM FACED PLYWOOD FACTORY

**Address:** Vinh Phuc Province, Vietnam

**Area:** 20,000 m2

**Capacity:** 3000m3 monthly

**Workers:** 100 Workers

## COMMERCIAL PLYWOOD FACTORY

**Address:** Phu Tho Province, Vietnam

**Acreage:** 12,000 m2

**Capacity:** 3000 m3 monthly

**Workers:** 102 Workers

## PACKING & LVL PLYWOOD FACTORY

**Address:** Yen Bai Province, Vietnam

**Area:** 10,000 m2

**Capacity:** 2500 m3 monthly

**Workers:** 85 workers



## MEMBERS

**Head Quarter:** FOMEX Building,  
#2 Lane 68, Luu Huu Phuoc St,  
Nam Tu Liem District, Hanoi,  
Vietnam

## FOMEX VENEER FACTORY

**Address:** Nghe An Province, Vietnam

**Area:** 20,000 m2

## FOMEX GLOBAL JSC

**Address:** 5<sup>th</sup> Floor, FOMEX Building, #2 Lane 68, Luu Huu Phuoc,  
Cau Dien, Nam Tu Liem, Hanoi, Vietnam

## VIET AN KHANG IMPORT-EXPORT JSC

**Address:** 6<sup>th</sup> Floor, FOMEX Building, #2 Lane 68, Luu Huu Phuoc,  
Cau Dien, Nam Tu Liem, Hanoi, Vietnam1

## FOMEX VIET NAM JSC

**Address:** 7<sup>th</sup> Floor, FOMEX Building, #2 Lane 68, Luu Huu Phuoc,  
Cau Dien, Nam Tu Liem, Hanoi, Vietnam



Fomex Group

# About Us



## FILM FACED PLYWOOD FACTORY

**Address:** Vinh Phuc Province, Vietnam

**Area:** 20,000 m<sup>2</sup>

**Capacity:** 3000m<sup>3</sup> monthly

**Workers:** 100 Workers

**Veneer Drier:** 02

**Layering Line:** 04

**Glue Spreader:** 04

**Cold-Press:** 04

**Hot-Press:** 05

**Sanding Machine:** 01

**Cutting Machine:** 01



Fomex Group

# About Us

●●●●●

## COMMERCIAL PLYWOOD FACTORY

**Address:** Phu Tho Province, Vietnam

**Area:** 12,000 m<sup>2</sup>

**Capacity:** 3000 m<sup>3</sup> monthly

**Workers:** 102 Workers

**Layering Line:** 03


**Glue Spreader:** 03

**Cold-Press:** 04

**Hot-press:** 05

**Sanding Machine:** 01

**Cutting Machine:** 01

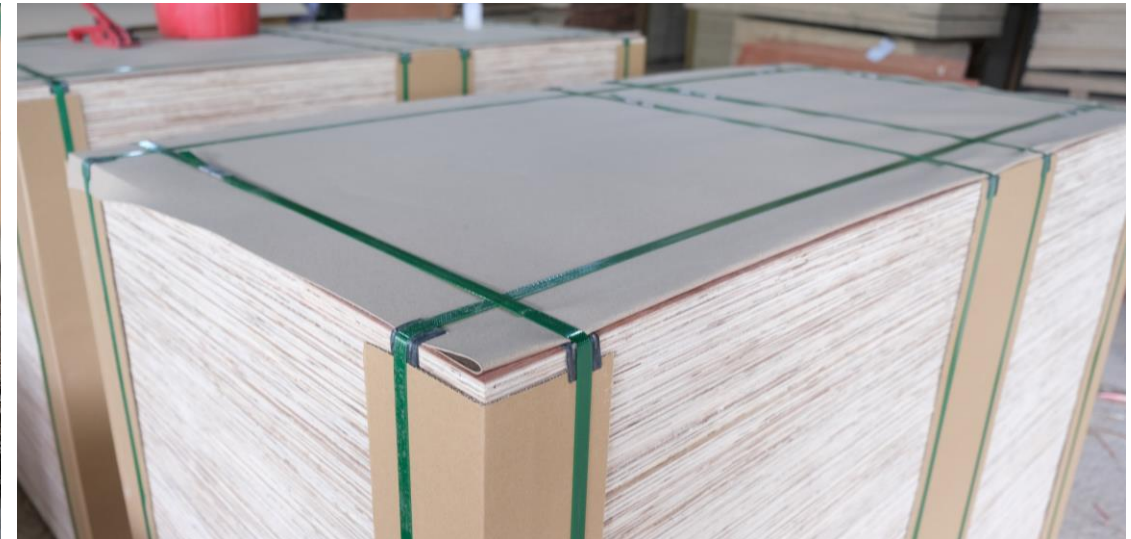

Fomex Group

# About Us



## PACKING & LVL PLYWOOD FACTORY

**Address:** Yen Bai Province, Vietnam

**Area:** 10,000 m<sup>2</sup>

**Capacity:** 2500 m<sup>3</sup> monthly

**Workers:** 85 workers

**Wood Log Baker Machine:** 02

**Wood Log Peeling Machine:** 02

**Styrax Peeling Machine:** 01

**Layering Table:** 12

**Glue Spreader:** 05

**Hot-press:** 12

**Cutting Machine:** 01



Fomex Group

# About Us

●●●●●

## FOMEX VENEER FACTORY

**Address:** Nghe An Province, Vietnam

**Area:** 20,000 m2

**Wood Log debarking Machine:** 02

**Wood Log Peeling Machine:** 04



Fomex Group


# About Us



## FOMEX NGHE AN FACTORY (2023)

**Address:** Nghe An Province, Vietnam

**Area:** 110,000 m<sup>2</sup>

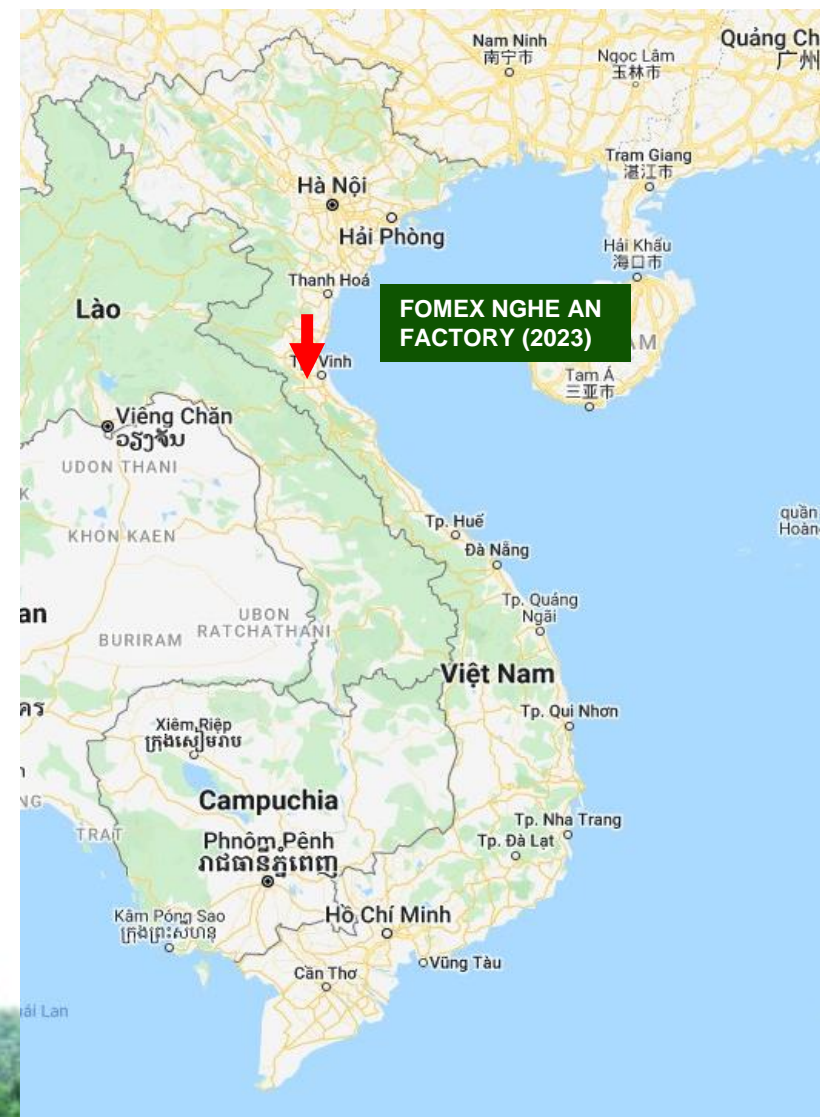

Fomex Group

# About Us



## FOMEX VENEER FACTORY



## PLYWOOD FACTORIES




## QC/QA



## DELIVERY



# What make us different from other suppliers from Vietnam?

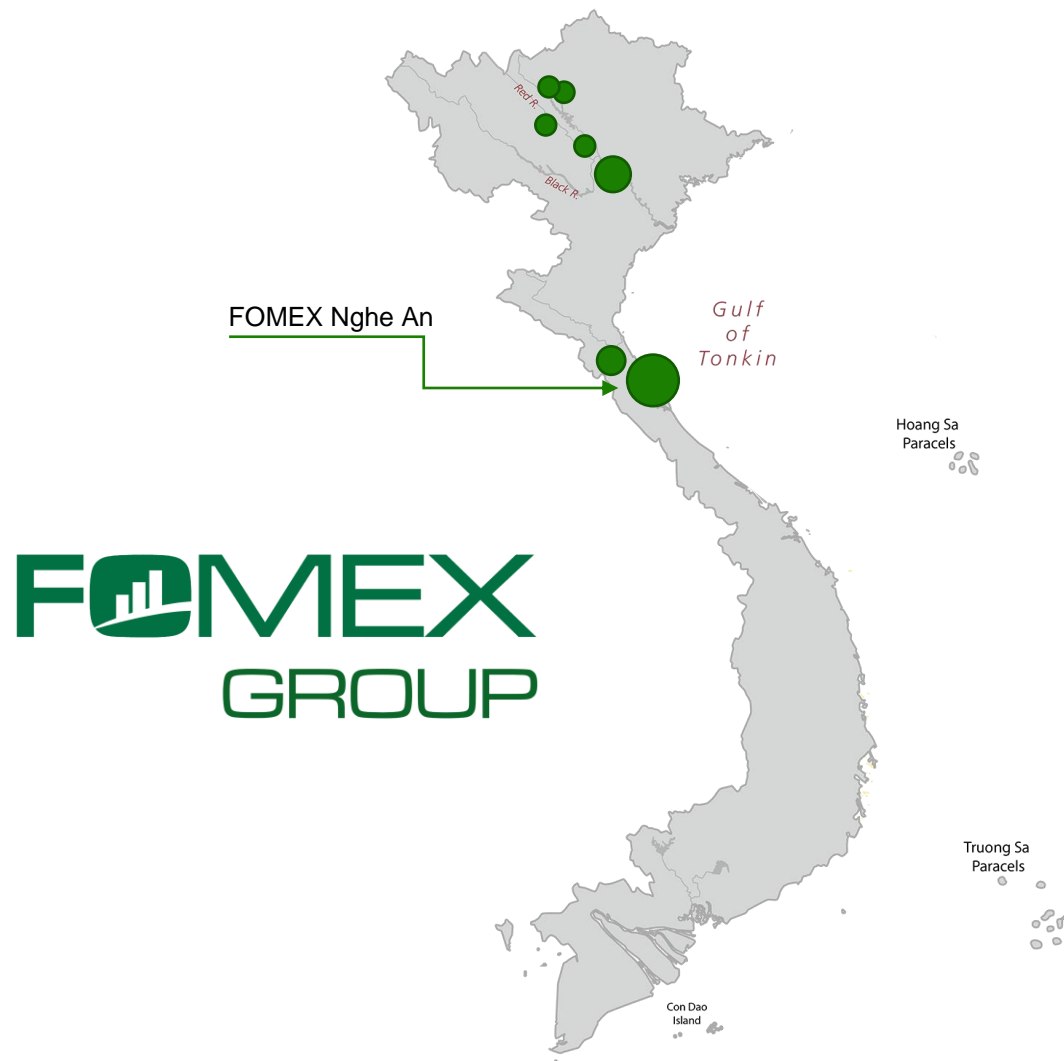



## Film Faced Plywood

**Using:** 3 times, 4-6 times, 8-10 times, 15 times, 25 times

**Core:** Eucalyptus/Acacia

**Glue:** WBP Melamine

**Face/Back:** Phenolic Film


**Hot-press:** 2 times

**Sanding:** 3 times

**Standard Size:** 1220x2440, 1250x2440, 610x2440

**Thickness:** 11mm, 12mm, 17mm, 18mm

**Thickness tolerance:** +/- 0.3-0.5mm

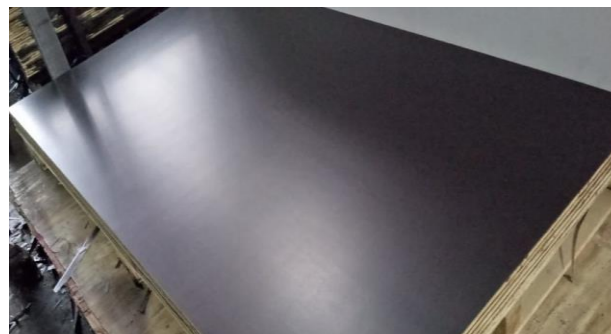

## Commercial Plywood

**Grade:** AA, AB, BB

**Core:** Eucalyptus/Acacia/Mixed Hardwood

**Glue:** MR E2/E1

**Face/Back:** Bintangor, Okoume, Sapele, Birch, ...


**Hot-press:** 2 times

**Sanding:** 2 times

**Standard Size:** 900x1800mm, 1220x2440mm, 1230x2440mm, 915x1830mm

**Thickness:** 8-24mm

**Thickness tolerance:** +/- 0.3-0.5mm

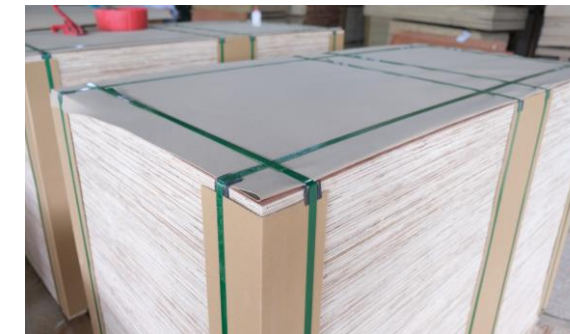

## Packing Plywood

**Grade:** AB, BC

**Core:** Eucalyptus/Acacia/Mixed Hardwood

**Glue:** MR E2

**Face/Back:** Bintangor-Styrax, Okoume-Styrax, Styrax-Styrax


**Hot-press:** 1 time

**Sanding:** No

**Standard Size:** 1220x2440, 1250x2440, 610x2440

**Thickness:** 8mm-30mm

**Thickness tolerance:** +/- 0.5-1mm

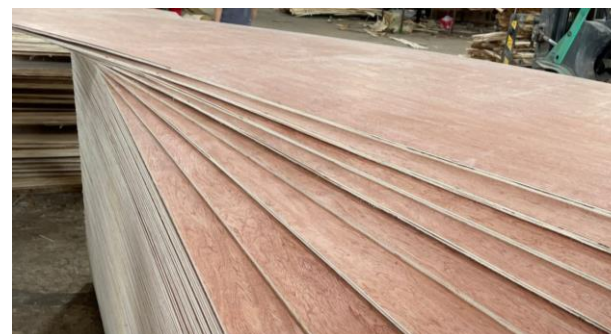

Fomex Group

# Products



## LVL

**Core:** Eucalyptus/Acacia

**Glue:** MR E2

**Face/Back:** nil

**Hot-press:** 1 time

**Sanding:** Optional

**Thickness:** 9mm-80mm

**Length:** <4000mm

**Width:** <1220mm

**Thickness tolerance:** +/- 0.3-0.5mm

**Application:** Pallet manufacturing, construction beam, sofa beam, door frame, ...



## BIRCH PLYWOOD

**Core:** Eucalyptus/Acacia

**Glue:** E0

**Face/Back:** White Birch

**Hot-press:** 3 times

**Sanding:** 3 times

**Thickness:** 5mm-21mm

**Thickness tolerance:** +/- 0.2-0.5mm

**Size:** 1220x2440mm, 1250x2500mm

**Application:** Cabinet, Sofa Frame, Wall, Roof, ...



# Timber Inspection Service



## PRODUCTION TIMELINE

Pre  
Production

During  
Production

Finish  
Production

Loading  
Supervision

Level III

Level II

Level I



## QUANTITY & QUALITY REPORT

No.: -

Date: July 21th, 2021

Inspection Result  
**PASS**

### GENERAL INFORMATION

Company name	-
Product	Laminated Veneer Lumber (LVL)
Contract No.	-
Specification	As detail below
Place of Inspection	-
QC Inspector	Mr. Thang
Report Approved by	Mr. Tuan

### PRODUCT DETAILS

No.	Product Description	Size	Total quantity	Packaging
1	LAMINATED VENEER LUMBER Core: Hardwood Face/Back: No Glue: MR E2 Hot-press: 1 time Moisture Content: Maximum 15% Thickness tolerance: +/-1mm Width and Length tolerance: +/-1mm	1200 x 98 x 18mm	40 bundles 4,200 pcs	Fomex International Packaging Standard
		1100 x 88 x 17mm	204 bundles 22,200 pcs	

### INSPECTION RESULT SUMMARY

Section	Description	Actual	Result		Remark
			Qualified	Un-qualified	
1	Moisture Content	9-13%	x		100% Qualified
2	Width and Length	+/-1mm	x		100% Qualified
3	Thickness	+/-1 mm	x		96% Qualified
4	Face/Back	No	x		
5	Core	Hardwood	x		
6	Delamination	No delamination	x		
7	Packaging	Strong pallets & strap	x		
INSPECTION RESULT			Pass		

\*\*\* Remark: This contract has been delivered into 1 shipment on July 20<sup>th</sup>, 2021. Total 7 containers.



## LOADING REPORT

No.: QC-

Date: July 21th, 2021

### GENERAL INFORMATION

Company Name	-
Product	Laminated Veneer Lumber
Contract No.	-
Specification	as order detail below
Place of Loading:	-
QC Inspector:	Mr. Giang
Report Approved by:	Mr. Tuan

### ORDER DETAILS

Contract No.	Product	Quantity	Packaging
---	COMMERCIAL PLYWOOD Core: Hardwood Face/Back: White Birch Glue: MR E2 Moisture content: Maximum 14% Hot press: 2 time Tolerance Thickness: +/- 0.5mm Tolerance Width and Length: +/- 1mm Size: 18x1220x2440mm	55pcs x 80 bundles = 4400pcs Total: 5 containers	Fomex International Standard

### CONTAINER AND SEAL

No.	Container No.	Seal No.	Spec
1	YMMU623774-	YMAJ87280-	18x1220x2440mm Birch
2	SEGU579738-	YMAJ87280-	18x1220x2440mm Birch
3	TEMU763215-	YMAJ87280-	18x1220x2440mm Birch
4	TEMU762807-	YMAJ87281-	18x1220x2440mm Birch
5	TEMF756803-	YMAJ87281-	18x1220x2440mm Birch
6	#	#	#
7	#	#	#
8	#	#	#
9	#	#	#
10	#	#	#

### LOADING DETAILS

-----continue-----